

Housing for walls, floors & ceilings

Zehnder CLD

Description

Cleanable supply or exhaust housing consisting of a galvanized metal housing, an integrated noise absorption element and a corresponding connection flange using locking slide technology for ComfoTube 3" (75mm) ventilation tubes. The maximum supply/extract air volume is 18 cfm at an air velocity of 9.8 ft/s in the ventilation tube. CLD is suitable for installation in walls, ceilings and floors. The opening is provided with a protective cover (during construction) and Designer grilles can be fitted in the housing for surface-mounted or concealed installation.


Benefits

- Suitable for supply and extract air
- Suitable for wall or ceiling installation
- Air volumes up to 18cfm
- Sound absorbing
- Easy to install
- Air volume control with ComfoSet 75 (optional)
- Easy to clean
- Mounting bracket attached to housing
- Protective dust cover

CLD 75

Specifications

Material: Galvanized sheet steel
 Nominal air volume: 18 cfm
 Height: 9.5"
 Width: 5.7"
 Depth: 4.0"

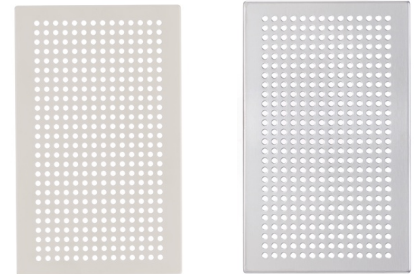

Roma (white)

Roma (stainless steel)

Article Numbers

Housing	Article Number	Reference Number
Register Box CLD 75	990 320 528	9408

Accessories	Article Number	Reference Number
ComfoSet 75 airflow regulator	990 320 026	9239
Extension Pin 25mm/1"	990 320 687	9412
Extension Pin 40mm/1.5"	990 320 688	9413



ComfoSet 75

Diffusers/Grilles	Article Number	Reference Number
ROMA Grille (stainless steel)	990 320 610	9263
ROMA Grille (white)	990 320 611	9264